


# 416-U (Ultimate) IN-COUNTER LOTTERY DISPENSER




The 416-U allows the tickets to be displayed directly under the glass

- All games are visible – no longer are some games down inside the dispenser with only a portion of the game visible
- The bottom glass is sealed in to prevent leakage if drinks are spilled
- The top glass is replaceable if it becomes scratched; note: there are no “scratch proof” products that will not wear during use in a c-store
- Two drawers that lock into the unit during use can be moved to secure storage when unit is not in use

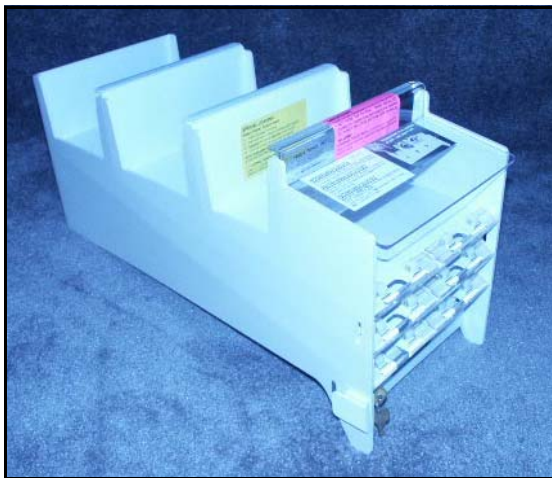

Individual 416-U drawer (#2 per unit)

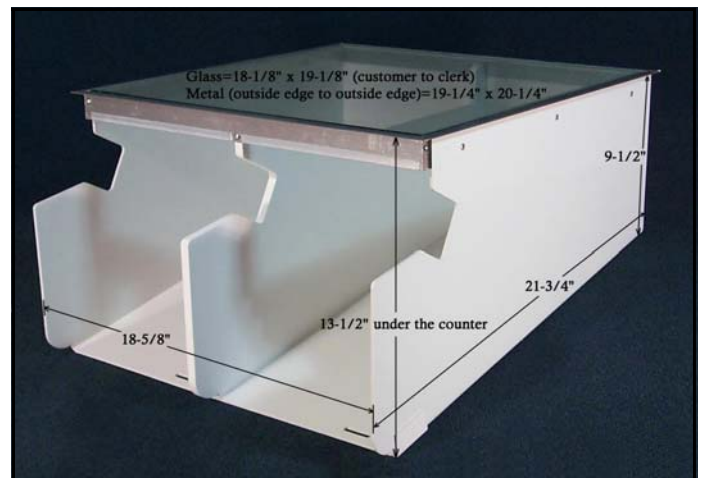

416-U base (see installation instructions on following page)

## ULTIMATE- 412-U and 416-U IN-COUNTER DISPENSER INSTALLATION

TAKE-A-TICKET, INC. RECOMMENDS YOU HAVE A PROFESSIONAL CONTRACTOR INSTALL THIS UNIT. HERE ARE SUGGESTIONS IF YOU CHOOSE TO DO IT YOURSELF.

Note: You may want to remove the loose top glass that is taped in before starting. The bottom glass is sealed in place to prevent leaking below the counter.

### #5 STEPS FOR INSTALLATION:

#### 1. CHECK CLEARANCE UNDER THE COUNTER BEFORE YOU CUT THE HOLE!

- ◆ The hole is 18-3/4" (clerk to customer) x 18-3/4". Depth is about 15" from the counter top to bottom of unit.
- ◆ The set back from the clerk's side is at least 4" so clerks do not bump into the unit.
- ◆ CHECK THE CLEARANCE AGAIN BEFORE YOU CUT THE HOLE!!! NOW CHECK IT AGAIN!!

#### 2. SEPARATE THE UPPER AND LOWER PARTS OF THE DISPENSER.

Do not lose the bolts, nuts, and washers. Set the drawers and base aside until upper part of unit (the portion with the glass) is installed in the counter.

#### 3. CUT THE HOLE. WAIT!!! ARE YOU SURE ABOUT THE LOCATION???

- ◆ Cut the hole to the specifications in step 1 above.
- ◆ Place a bead of caulking around the hole on the counter surface.
- ◆ Drop the upper portion of the dispenser (metal frame and glass) in the hole. Open side of the plastic faces the clerk.

#### 4. REATTACH THE BASE TO THE UPPER PORTION OF THE DISPENSER.

Adjust height as necessary when bolting the base to the upper part of the dispenser. Use the plastic spacer block taped to these instructions. Place block up to the lowest point on the metal frame and raise base up to the block as a starting point for the height.

#### 5. LOAD THE DRAWERS AND PLACE THEM IN THE BASE.

### LOADING AND MAINTENANCE FOR 416-U (ULTIMATE)

#### LOADING:

1. Customer must be able to read the tickets: The pack must be face up and facing the customer.
2. Start the tickets through the drawer slot: Extend the tickets from the bottom of the pack through the feed slot in the drawer.
3. Bend the ticket pack and place it in the ticket area in the drawer: Adjust the pack in the drawer for best exposure to the customer.
4. Repeat the steps above for all packs. Bingo and other short packs (6" or smaller) should be placed in the slots closest to the clerk.

#### REPLACEABLE TOP GLASS:

1. The top glass will eventually become scratched and should be replaced:
  - ◆ Ask your lottery rep. to provide new top piece or...
  - ◆ Contact TAT using the information below.
2. The bottom glass is sealed in place. Always have a piece of top glass in the dispenser. If the bottom glass becomes scratched it is difficult to replace!